

PFC 350W Single Output power supply

AK350 series



Features :

Universal AC input with active PFC

High efficiency up to 93%

+5V / 0.3A auxiliary output

150% Peak load Capability

1U profile, High power density

Built-in Constant current limiting circuit

Power OK signal ( Power good, Logic low)

Remote ON-OFF, Remote sense function

Protections : OVP, OLP, OTP, SCP, Fan failure


3 years warranty

SPECIFICATION

INPUT	Voltage and Frequency RANGE <sup>2</sup>	90 ~ 264VAC 47 ~ 63Hz, or 127 ~ 370VDC					
	AC CURRENT	4.0A / 115VAC   2.0A / 230VAC					
	INRUSH CURRENT(Typ.)	27A / 115VAC   54A / 230VAC					
	LEAKAGE CURRENT	<1.0mA / 240VAC					
	Power Factor (Typ.)	0.98 / 230VAC,   0.99 / 115VAC at ful l load					
MODEL		AK-350-05	AK-350-12	AK-350-15	AK-350-24	AK-350-48	
OUTPUT	DC VOLTAGE RANGE	5V	12V	15V	24V	48V	
	RATED CURRENT	60A	30A	24A	15A	7.5A	
	CURRENT RANGE	0~60A	0~30A	0~24A	0~15A	0~7.5A	
	RATED POWER	300W	360W	360W	360W	360W	
	Ripple & Noise (max.) <sup>3</sup>	150mVp-p	150mVp-p	150mVp-p	150mVp-p	150mVp-p	
	VOLTAGE ADJ. RANGE	±10% Typical adjustment by potentiometer					
	VOLTAGE TOLERANCE <sup>4</sup>	±1.0%					
	Line Regulation	±0.5%					
	Load Regulation	±0.5%					
	Setup, Rise Time	800ms, 60ms at ful l load					
	Hold Up Time (Typ.)	16ms / 230VAC at ful l load					
	EFFICIENCY (Typ.)	83%	90%	90%	91%	93%	
PROTECTION	Over Load	Normal ly works within 105 ~ 150% rated output power for more than 3 sec and then shutdown O/P voltage with auto-recovery, >150% rated power or short circuit is constant current l imiting, if o/p drop to 40% rating output voltage then shutdown and auto-recover 5 time, if fault condition not remove in this 5 time, the system wel l be shutdown and re-power on to recover.					
	Over Voltage	6.0 ~ 6.5V	14.4 ~ 15.6V	18 ~ 19.5V	28.8 ~ 31.2V	57.6 ~ 62.4V	
		Protection type: Latch-style (Recovery after reset AC power ON or inhibit)					
	Over Temperature	By detecting primary and secondary heat sink. Protection type: Shut down o/p voltage (Auto recovers automatical ly after temperature goes down)					
	Auxiliary Power	5V @ 0.3A ( +/- 3% )					
	FUNCTION	Remote ON/OFF Control	External switch or NPN Transistor to turn ON / OFF				
		Power OK Signal	Open drain signal low when PSU turns on, Max. sink current: 20mA, Max. drain voltage: 40V.				
ENVIRONMENT	WORKING TEMP.	-20 ~ +70°C (Refer to output load de-rating curve)					
	WORKING HUMIDITY	20 ~ 90% R.H non-condensing					
	STORAGE TEMP., HUMIDITY	-40~+85°C, 10 ~95% R.H					
	TEMP. COEFFICIENT	±0.02%/°C (0 ~ 50°C)					
	VIBRATION	10 ~ 500Hz, 5G 10min./1 cycle, period for 60 min. Each along X,Y,Z axes Compl iance to IEC 68-2-6, IEC 68-2-64					
SAFETY & EMC	SAFETY STANDARDS	UL 60950-1, 2nd Edition, TUV EN60950-1 : 2006+A11 Approved					
	WITHSTAND VOLTAGE	I/P-O/P: 3KVAC   I/P-FG: 1.5KVAC   O/P-FG: 0.5KVAC					
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG: 100MΩ / 500VDC					
	EMI CONDUCTION & RADIATION	EN55022 : 1998+A1 : 2000+A2 : 2003   Class B					
	HARMONIC CURRENT	EN61000-3-2 :2000+A2:2005 Class A, EN61000-3-3 : 1995+A1 :2001					
	EMS IMMUNITY	IEC61000-4-2,3,4,5,6,8,11					
OTHERS	MTBF	161K HRS Compliance : MIL-HDBK-217F					
	DIMENSION	199*105*41 mm / 7.83*4.13*1.61 inch					
	PACKING	1.05 kg ; 15pcs / 15.75kg / 0.69 CUFT					
NOTE	1. All l parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. De-rating may be needed under low input voltages. Please check the de-rating curve for more details. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47 uf parallel capacitor. 4. Tolerance: includes set up tolerance, line regulation and load regulation. 5. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.						


Mechanical Specification

Unit:mm[inch]

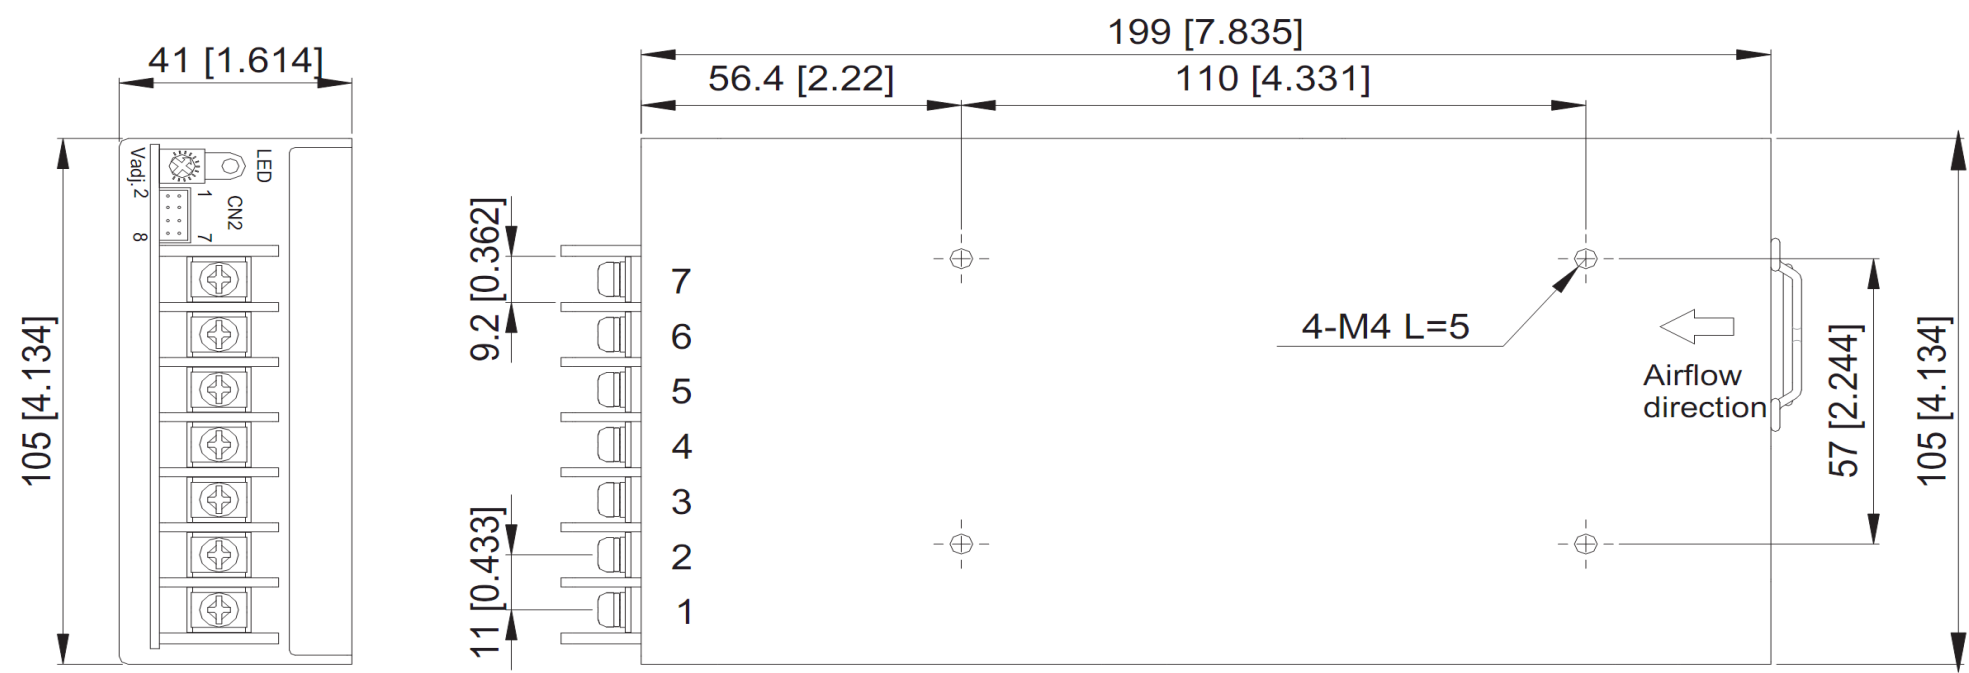

AC Input & DC Output  
Pin No. Assignment

Pin No.	Assignment
1	AC/L
2	AC/N
3	FG
4,5	-V
6,7	+V

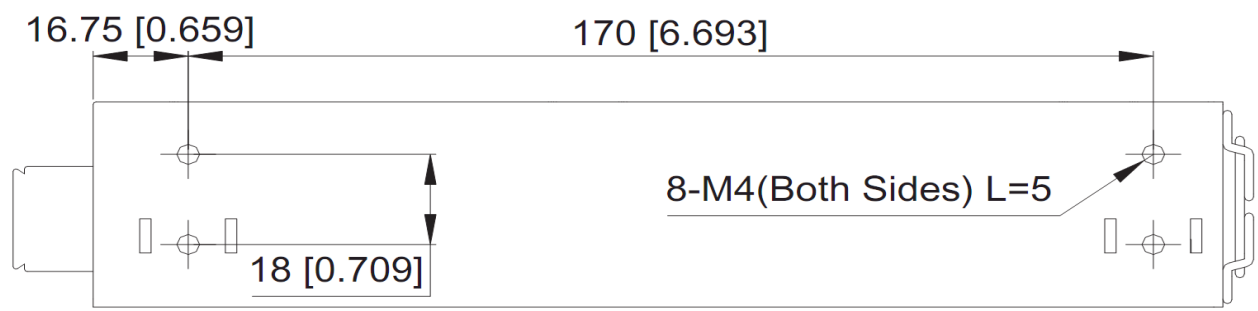



Control pin number assignment (CN2) : JST S8B-PHDSS or equivalent

Pin No.	Assignment	Pin No.	Assignment	Mating Housing	Terminal
1	AUX	5	GND	PHDR-08VS	SPHD-002T-P05
2	GND	6	EN+		
3	P-OK	7	VS+		
4	EN-	8	VS-		


Function Description of CN2

Pin No.	Function	Description
1	AUX	+5V / 0.3A auxiliary power
2	GND	Ground
3	P.OK	Power OK
4	EN-	Remote ON/OFF (-)
5	GND	Ground
6	EN+	Remote ON/OFF (+)
7	VS+	Remote voltage sense (+)
8	VS-	Remote voltage sense (-)


De-rating Curve

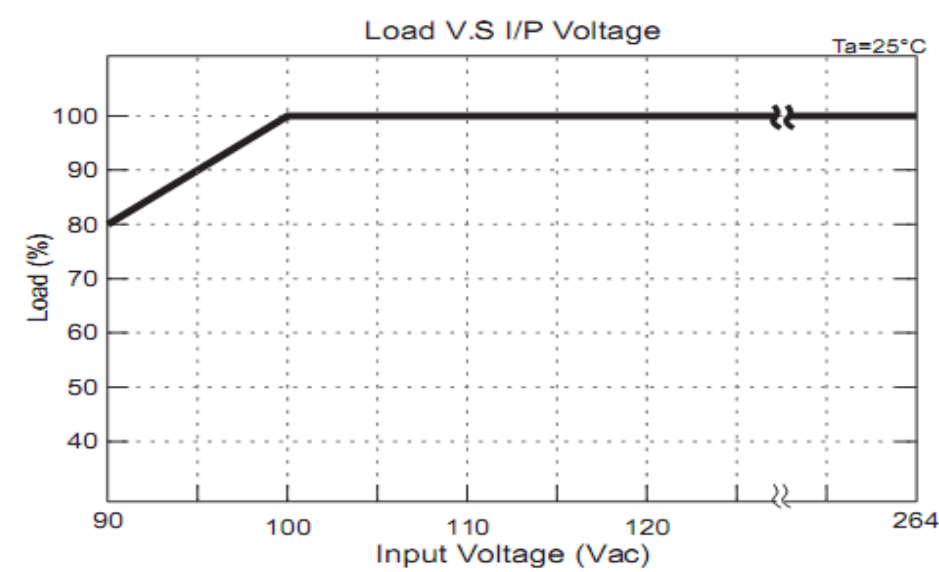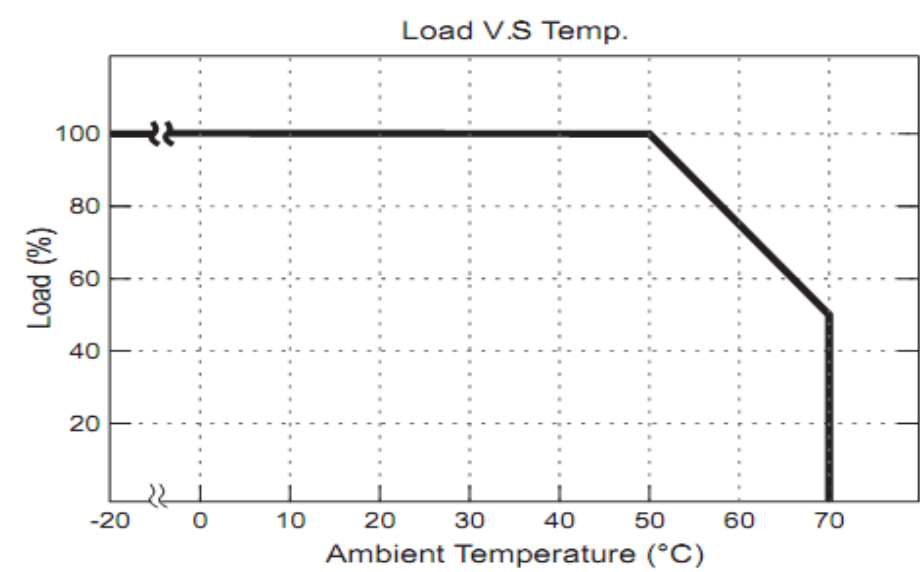


Peak Loading

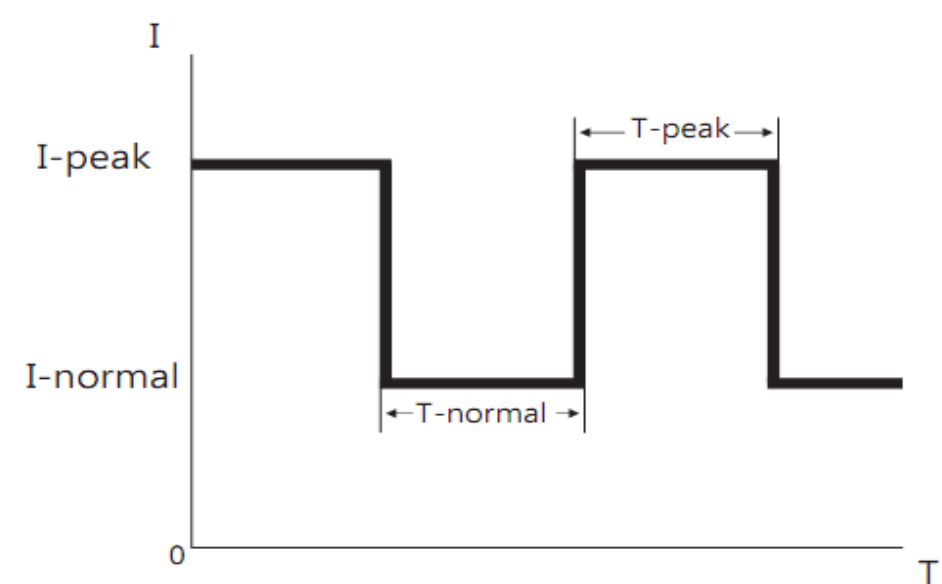

T-PEAK represents the period during which the output current is at 110% to 150% of nominal (shown as I-PEAK). Curve B shows the relationship between the percentage of peak current (I-PEAK) and the allowable duration (T-PEAK). If the peak current is taken for longer than the allowed duration indicated by curve B, the output current will drop to a constant limited current of 105% of nominal, then. The unit between peak currents (T-NORMAL) is dependant up on the output current drawn between the peaks (I-NORMAL) and curve A shows the relationship between the two. The higher the percentage of normal current (I-NORMAL) is of the nominal current, the longer the interval (T-NORMAL) before the next peak current can be drawn.

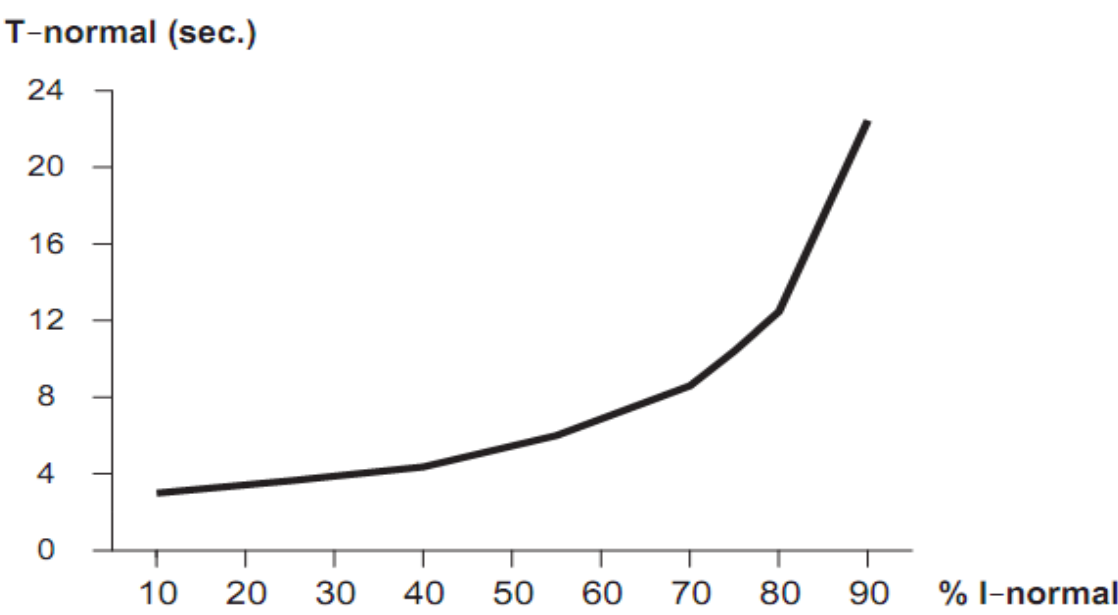


CURVE A

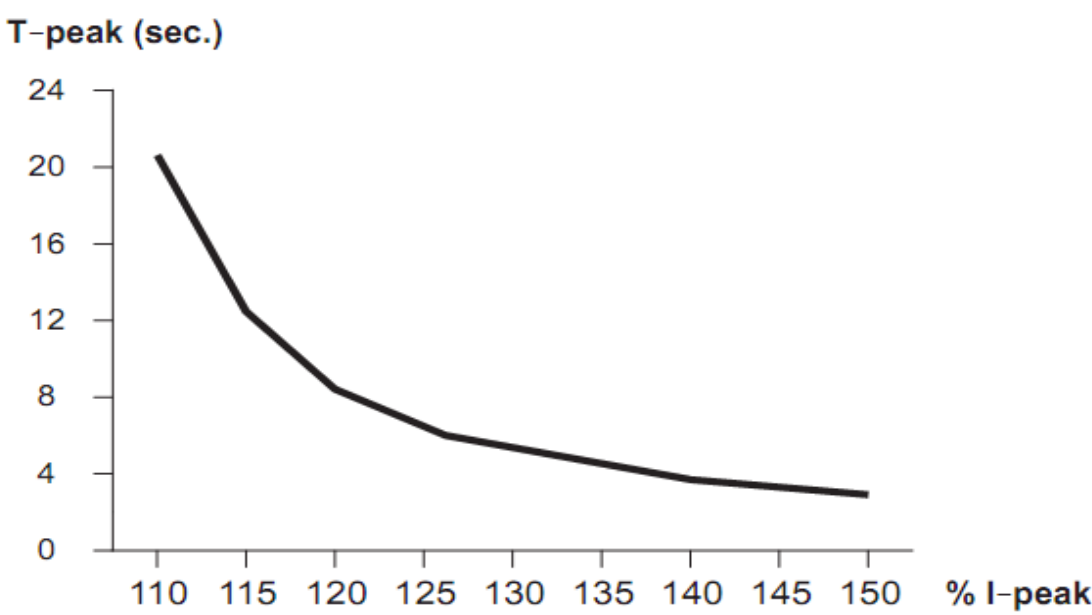


CURVE B

1. Power OK Signal and Auxiliary output

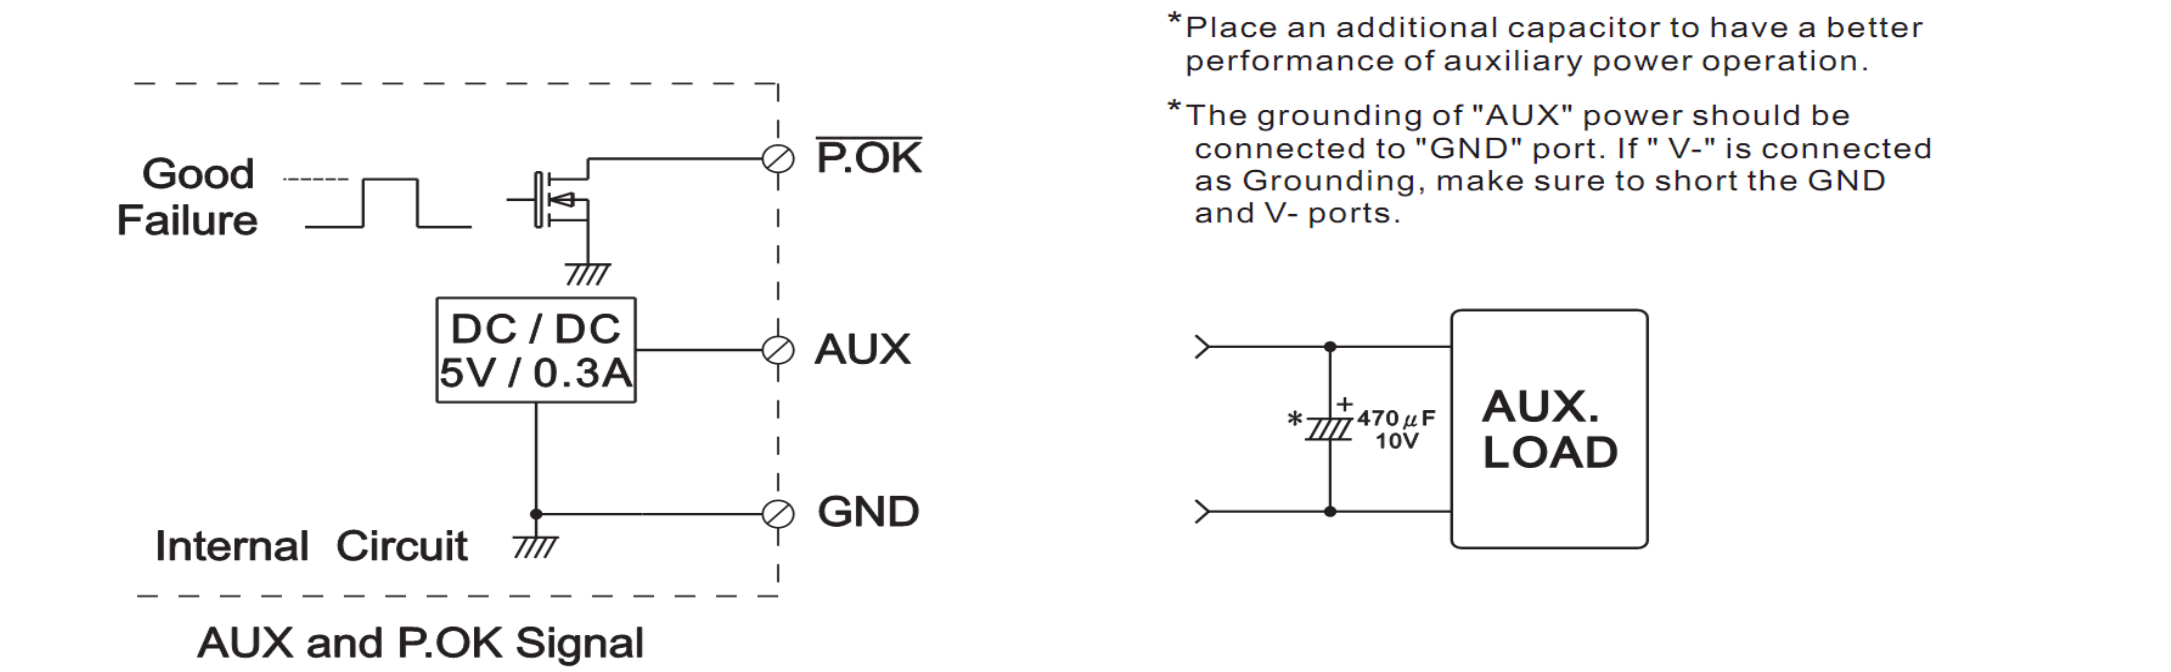

2. Remote ON/OFF Control

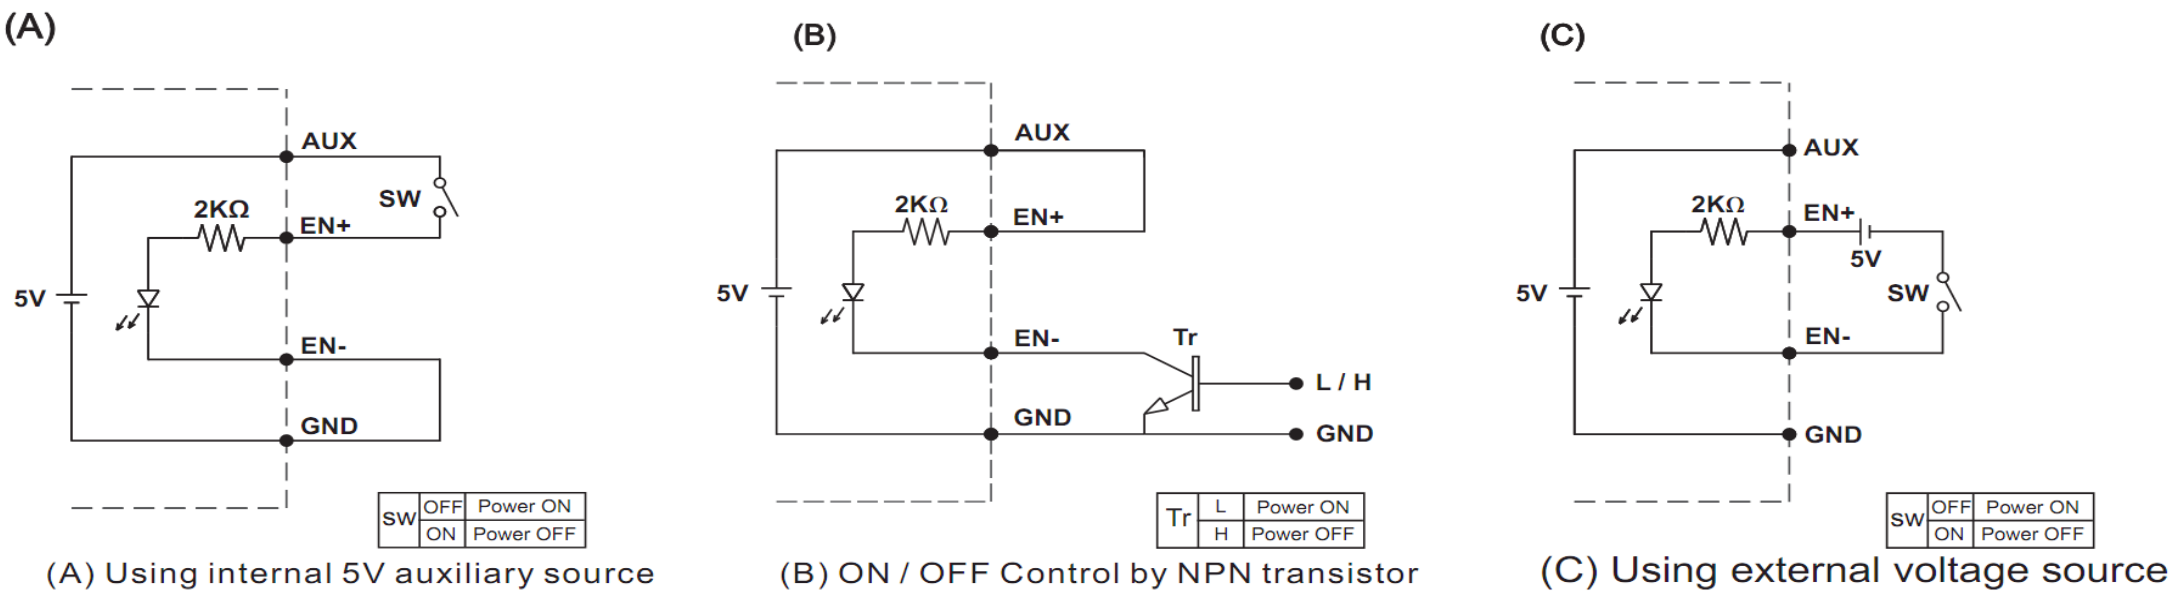

3. Remote Sense

